


汽车发动机正时套筒链

Timing bush chains for automobile engine

发动机正时套筒链主要用于柴油发动机正时系统、平衡轴系统，套筒链与滚子链相比，结构简单，具备较高的耐磨性能。

Bush chain for engine timing is mainly used for diesel engine timing system and the balance shaft system etc. Compared with the roller chain, it has simpler structure and higher wear resistance.

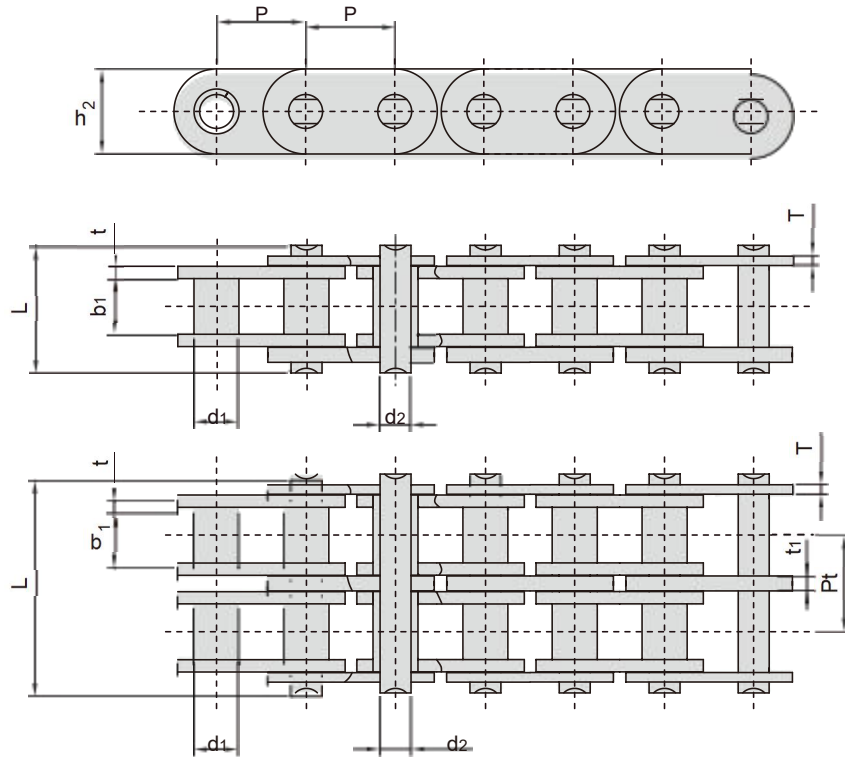

Hawkvine	节距 Pitch	套筒直径 Bush diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	内链板高度 Inner plate depth	链板厚度 Plate thickness		排距 Transverse pitch	抗拉强度 Tensile strength	每米长重 Weight per meter
Chain No.	P	d1 max	b1 min	d2 max	L max	h2 max	t/t1 max	T max	Pt	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m
P7	7.000	4.00	3.50	2.70	9.60	6.8	1.15	1.00	-	6.9/1551	0.31
P7F1	7.000	4.00	3.40	2.70	9.80	6.8	1.20	1.20	-	6.9/1551	0.33
05C	8.000	5.00	4.76	3.15	11.80	7.6	1.30	1.00	-	8.5/1932	0.35
06D	9.525	6.35	3.80	4.45	10.70	9.6	1.35	1.04	-	9.0/2024	0.41
06DTF1	9.525	6.35	5.72	4.45	14.25	9.6	1.80	1.30	-	14.5/3259	0.57
06DTF2	9.525	6.35	5.72	4.45	14.55	9.6	1.75	1.40	-	14.5/3259	0.60
06DF2-2	9.525	6.35	3.80	4.46	18.80	9.6	1.35/1.40	1.04	8.30	16.2/3641	0.76
06DF3-2	9.525	6.35	4.40	4.46	21.70	9.6	1.50	1.30	9.70	18.7/4203	0.86